



## vibration dampers NMS

**SECOND GRADE QUALITY**

**REMAINDER ITEMS  
FROM DISCONTINUED SERIES  
AT BARGAIN PRICE**

**WHILE SUPPLIES LAST**



## vibration dampers NMS

### SECOND GRADE QUALITY REMAINDER ITEMS FROM DISCONTINUED SERIES AT BARGAIN PRICE


### WHILE SUPPLIES LAST

> optical imperfections on the zinc-galvanized surface <  
> technically-functionally in proper condition <

description	D1	D2	H	H1 max	bolt-in thread	surface	shorehardness	load	price*
	mm	mm	mm	Ni/mm			+/5 Shore	daN	
NMS - 50	45	32	22	6	M10	zinc-coated	NBR 70	150	EUR 5.-
NMS - 100	100	77	36	10	M12	zinc-coated	NBR 70	600	EUR 10.-
NMS - 160	160	130	40	13	M16	zinc-coated	NBR 70	1800	EUR 15.-
NMS - 200	200	167	45	15	M24	zinc-coated	NBR 70	3500	EUR 25.-

**\* bargain price per unit, supply without screw DIN 933/ISO 4017, while supplies last, prices quoted are net, EXW, subject to prior sale**

The product series NMS features stable and precise levelling, providing for an anchor-free ( 'no-drilling' ) machine installation. Especially suitable for presses, punches and machines alike. The vulcanized elastomer with non-slip tread reduces the machine's tendency of moving in the occurrence of horizontal forces.

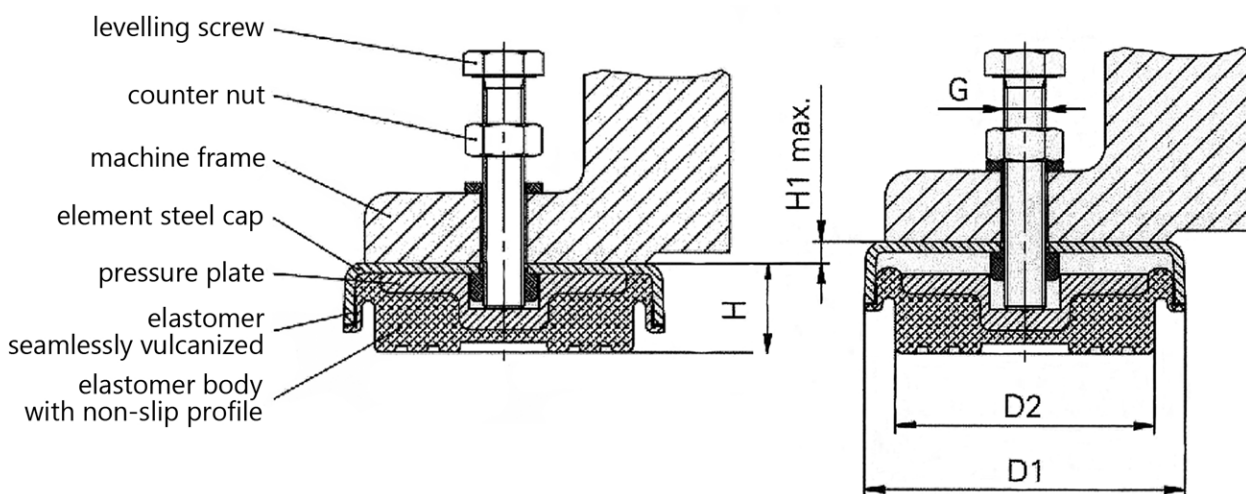

The black-coloured rubber damper is made of nitrile butadiene (NBR), persistent towards mineral- and hydraulic oils, temperature-storing oils, pneumatic-, gear- and motor oils, lubricants, corrosion protection, filter oils, oil-water emulsions and flammable liquids ( petrols, benzine and kerosine, heating oil, special petrols and petroleum ). Temperature-stable up to 80°C.

Technical modifications subject to change! Any previous versions of this document are herewith null and void!